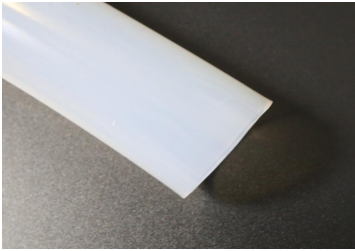


Unreinforced platinum vulcanized silicone hose

Product images	Application	Characteristic	Structure
	► Transport of liquids	► Corrosion resistance	► Color: Transparent
	► Extraction of air/steam	► Smooth inner wall	► Temperature: -40/+220 °C
	► CIP and SIP cleaning	► Odorless/Odorless	► Length can be customized
	► Food factory	► Good liquidity	
	► Medical devices	► Good airtightness	
	► Cosmetics industry	► High temperature and steam resistance	
► Hose wall: FDA certified platinum sulfide silicone		► FDA certification	

Part Number	Internal Diameter	Outer diameter	Bending Radius
	mm	mm	mm
ZS09-4.76-7.92-15	4.76	7.92	20
ZS09-3.18-6.34-15	3.18	6.34	30
ZS09-6.35-9.60-15	6.35	9.60	40
ZS09-7.90-11.11-15	7.90	11.11	60
ZS09-6.40-11.40-15	6.40	11.40	90
ZS09-4.80-8.00-15	4.80	8.00	110
ZS09-6.40-13.00-15	6.40	13.00	150
ZS09-7.90-14.70-15	7.90	14.70	200
ZS09-9.50-14.70-15	9.50	14.70	280
ZS09-7.90-18.90-15	7.90	18.90	200
ZS09-7.90-16.10-15	7.90	16.10	200
ZS09-12.70-19.30-15	12.70	19.30	200
ZS09-12.70-25.30-15	12.70	25.30	200
ZS09-12.70-22.20-15	12.70	22.20	200
ZS09-15.90-22.20-15	15.90	22.20	200
ZS09-19.05-32.06-15	19.05	32.60	350

Note: * All technical parameters are approximate values and measured under conditions of 23 °C operating temperature and 50% ambient humidity. They may change accordingly based on actual operating conditions.

* We will periodically revise or adjust the relevant parameters. If we are unable to notify in a timely manner, please forgive us and refer to the data published on the website or company.